

- **B3424** 34-1/2"L x 24-1/4"D x 82-3/8"H
- **B4524** 45-1/2"L x 24-1/4"D x 82-3/8"H
- **B6624** 66-3/8"L x 24-1/4"D x 82-3/8"H
- **B8824** 88-3/8"L x 24-1/4"D x 82-3/8"H

Included

- Breeze~E (Type-II) self-contained refrigeration
- Blue Fin coated coil
- Condensate pan (self-contained refig. only)
- Integrated average product temperature of 40°F or less
- LED 4000K top light(s)
- One piece formed ABS plastic tub (n/a B8824)
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Shelving removable and adjustable on 1" centers




B3424

| Specify | Standard Features | Additional Options |
|--------------------------------|---|--|
| EXTERIOR COLOR | • Laminate (stock colors) | • Laminate (non-stock colors) • Stainless steel |
| INTERIOR COLOR | • Powder coated Silversan Black | • Stainless steel |
| LOWER FRONT PANEL COLOR | • Powder coated Silversan Black | • Stainless steel (must choose stainless exterior) |
| REAR EXTERIOR COLOR | • Black | • White |
| BASE SUPPORT | • Casters w/ levelers (self-cont.) | • Levelers (only) • Seismic levelers |
| END PANELS | • Full w/stainless steel mirror interior | • Cutaway w/glass • None (synchronized defrost required) |
| UPPER FRONT PANEL | • Flat front panel | • Black slatwall |
| REAR DOORS | • None (solid back panel) | • Rear loading hinged doors, locking |
| SHELVING | • Metal shelves, non-lighted | • Metal shelves, lighted (LED 4000K) |
| ELECTRICAL CONNECTION | • 6' Straight blade power cord (base exit) | • 6' Locking blade power cord (base exit) • 6' Locking blade power cord (top exit) • 6' Straight blade power cord (top exit) • Electrical leads (remote) |
| REFRIGERATION | • Breeze~E (Type-II) self-contained refrigeration | • Note: Remote doesn't incl Conds unit. Floor drain reqd. ¹ • Remote w/thermostat, solenoid & TXV |
| MISCELLANEOUS | | • Second year parts & labor warranty (excludes compressor) • Shelf w/ extended product stop & air deflectors for salad bins |
| ACCESSORIES | | • Clean Sweep® coil cleaner (self-cont.) • Night curtain, retractable, non-locking • Price tag molding (matches interior color) • Removable solid security cover, locking |

Option Notes: 1 - See tech spec for load reqmts


| | | |
|--|---|----------------------------------|
| Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise in system information below. | | |
| Zone | Intended Product To Be Displayed | Warmest Avg Prod Temp ° F |
| 1 | Packaged refrigerated products | 40 |

PLAN VIEW

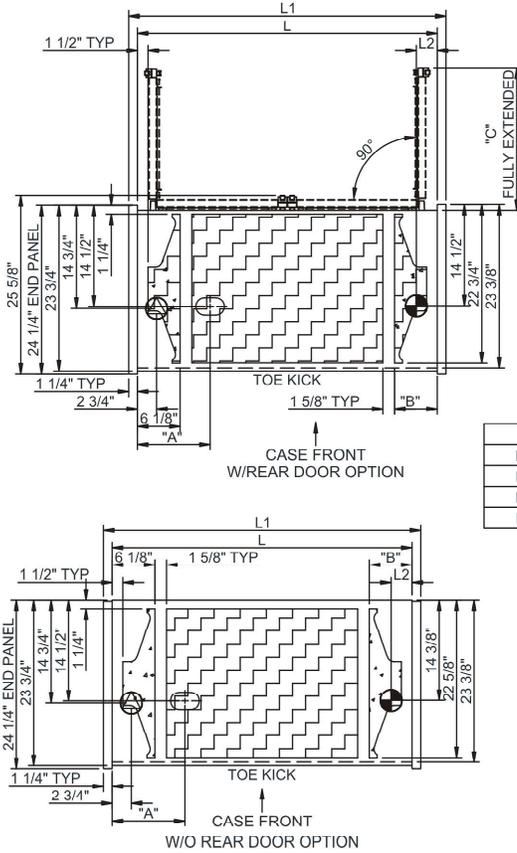

| | "A" | "B" | "C" |
|-------|---------|---------|---------|
| B3424 | 7" | N/A | 29 1/2" |
| B4524 | 7" | 6 1/8" | 20 3/8" |
| B6624 | 10 3/8" | 6 1/8" | N.A. |
| B8824 | 19 3/8" | 17 1/2" | N.A. |

SIDE VIEW

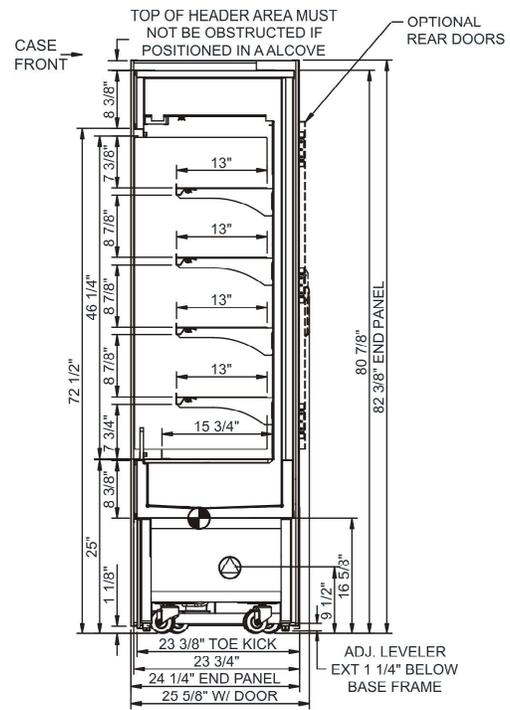

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/2" OR 1", PVC TUBE).
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- REFRIGERATION LINE CONNECTION.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

| Model | L" | L1" | L2" | System Circuit Volts | | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug | SST | Conv. Rack BTU/H | Para. Rack BTU/H | Est Wt | |
|-------|-------|-------|------|------------------------|------------------------|---------|------|----------|-------|-------|-----------|-----------------|------------------|------------------|--------|-------|
| | | | | Remote (DX) | Self-Contained (R513A) | | | | | | | | | | | |
| B3424 | 32.00 | 34.50 | 3.13 | Remote (DX) | Circuit #1 | 110-120 | 1 | 60 | 1.20 | 60 | 2+G | Leads Single | 20.00 | 5098 | 4720 | 800 |
| | | | | Self-Contained (R513A) | Circuit #1 | 110-120 | 1 | 60 | 15.64 | 1,198 | 2+G | 5-20P or L5-20P | N/A | N/A | N/A | |
| B4524 | 43.00 | 45.50 | 3.13 | Remote (DX) | Circuit #1 | 110-120 | 1 | 60 | 1.26 | 77 | 2+G | Leads Single | 20.00 | 5659 | 5240 | 900 |
| | | | | Self-Contained (R449A) | Circuit #1 | 208-240 | 1 | 60 | 10.82 | 2,023 | 2+G | 6-15P or L6-15P | N/A | N/A | N/A | |
| B6624 | 63.88 | 66.38 | 3.13 | Remote (DX) | Circuit #1 | 110-120 | 1 | 60 | 1.92 | 130 | 2+G | Leads Single | 20.00 | 5659 | 5240 | 1,100 |
| | | | | Self-Contained (R449A) | Circuit #1 | 208-240 | 1 | 60 | 13.92 | 2,593 | 2+G | 6-20P or L6-20P | N/A | N/A | N/A | |
| B8824 | 85.88 | 88.38 | 3.13 | Remote (DX) | Circuit #1 | 110-120 | 1 | 60 | 2.25 | 158 | 2+G | Leads Single | 20.00 | 11189 | 10360 | 1,200 |
| | | | | Self-Contained (R449A) | Circuit #1 | 208-240 | 1 | 60 | 16.00 | 3,196 | 2+G | 6-20P or L6-20P | N/A | N/A | N/A | |

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

| | |
|------------|---|
| All Models | Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 UL Sanitation to NSF Std 7 |
|------------|---|



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- Tile floors, low ceilings, or small rooms will increase noise level.
- Compressor air lower front intake and upper front discharge. Front panel cannot be blocked.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.