

Wine - Service Refrigerated Wine Case - Wood

Models
CDR4287A




Features	Standard	Options
INTERIOR COLOR	<input type="checkbox"/> Stainless steel	
BASE SUPPORT	<input type="checkbox"/> Casters w/ levelers	
END PANELS	<input type="checkbox"/> Full	<input type="checkbox"/> Filler panel (specify adjacent case)
EXTERIOR	<input type="checkbox"/> American Walnut Oak	<input type="checkbox"/> Varathane Carbon Grey Oak
REAR	<input type="checkbox"/> Solid back panel	
SHELVING	<input type="checkbox"/> Chrome bottle grid & stainless steel non-lighted shelving	
LIGHTS	<input type="checkbox"/> LED side lights	
ELECTRICAL CONNECT	<input type="checkbox"/> 6' Straight blade power cord w/ right angled plug	
REFRIGERATION	<input type="checkbox"/> Breeze w/EnergyWise s/c refrigeration	

Applications

- Refrigerated service case for bottled wine display

Wine Service Refrigerated Wine Case - Wood

Model	L x D x H (Lengths include end panels)
CDR4287A	47"L x 27-5/8"D x 95-3/8"H

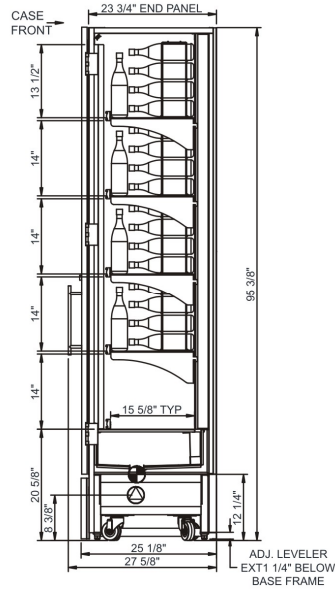

IMPORTANT NOTES:

- 1) Compressor air ventilation drawn from lower front, channeled up rear and discharged out upper front. Front panel cannot be blocked. Product temperature will be affected if air curtain is disrupted.

WARNING

This product can expose you to chemicals including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

INTENDED ENVIRONMENT

Designed to operate in ambient conditions of 75°F with 55% relative humidity.

WARMEST AVG PRODUCT TEMP

Zone	Temp (°F)
1	55

INTENDED USE OF DISPLAY AREAS

Zone	Intended Use
1	Bottled or packaged perishable products

Wine - Service Refrigerated Wine Case - Wood

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
CDR4287A	N/A	47.000	4.000	N/A

ELECTRICAL																
Model	System Circuit Volts				Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
CDR4287A	Remote(DX)	Circuit #1	110-120	1	60	1.38	15	15	78	2+G	Leads Multiple	0.70	0.60		0.08	
	Remote(GLYCOL)	Circuit #1	110-120	1	60	1.30	15	15	68	2+G	Leads Multiple	0.70	0.60		N/A	
	Self-Contained	Circuit #1	110-120	1	60	11.55	15	15	1,049	N/A	5-15P or L5-15P	0.70	0.60	6.25	4.00	

REFRIGERATION														
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION				
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration (Mins)	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)	
CDR4287A	All	Main	Remote-DX	Type I	40	1,266	1,172	0.00	0.00	N/A	N/A	N/A	N/A	
	All	Main	Remote-Glycol	Type I	N/A	0	0	0.00	0.00	0.25	0.30	35%	40.00	
	All	Main	Self-Contained-R513A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	


INTENDED ENVIRONMENT		
WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES		
Zone	Temp (°F)	Intended Use
1	55	Bottled or packaged perishable products

IMPORTANT NOTES
1) Compressor air ventilation drawn from lower front, channeled up rear and discharged out upper front. Front panel cannot be blocked. Product temperature will be affected if air curtain is disrupted.

REGULATORY	
All Models	ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120



Wine - Service Refrigerated Wine Case - Wood

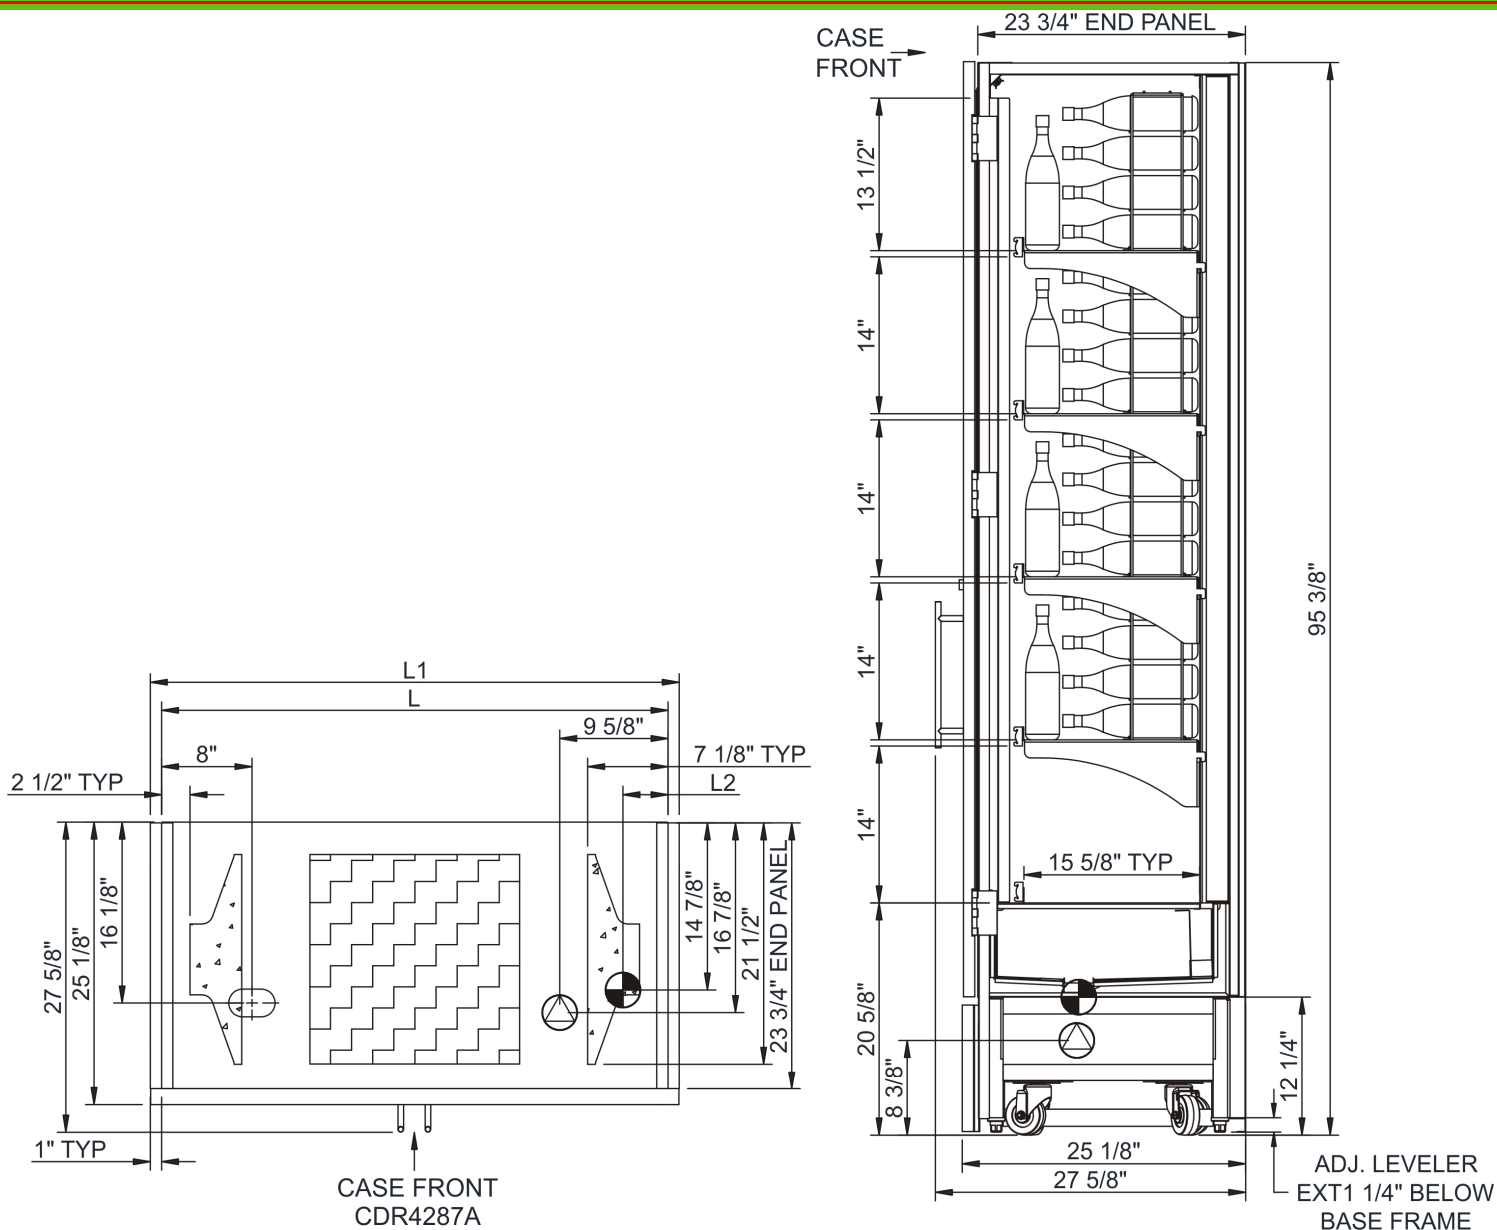

NOTE: ALL DIMENSIONS APPROXIMATE

- ⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- ⊙ REFRIGERATION LINE CONNECTION.
- ⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- ⊙ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- ⊙ SELF-CONTAINED CASE SERVICE ACCESS AREA.
- ⊙ DRY CASE SERVICE ACCESS AREA.