

Salad/Sandwich Prep - Bread Display Shelving Cart

Must Purchase BDRxx65.5716 w/ This Cart

Models

CDR7765



Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (Carbon Mesh)	
INTERIOR COLOR	<input type="checkbox"/> Stainless steel	
BASE SUPPORT	<input type="checkbox"/> Casters	
REAR STORAGE	<input type="checkbox"/> Non-refrigerated rear storage w/adjustable shelf (w/o doors)	
TOP	<input type="checkbox"/> Stainless steel	
SHELVING	<input type="checkbox"/> Tray support, non-lighted shelves	
TRAYS	<input type="checkbox"/> Holds (4) 18" x 26" trays	


Applications

- Upright non-refrigerated service merchandiser for bread display.

Salad/Sandwich Prep Bread Display Shelving Cart

Must Purchase BDRxx65.5716 w/ This Cart

Model	L x D x H (Lengths include end panels)
CDR7765	21-1/2" L x 28-3/8"D x 63"H

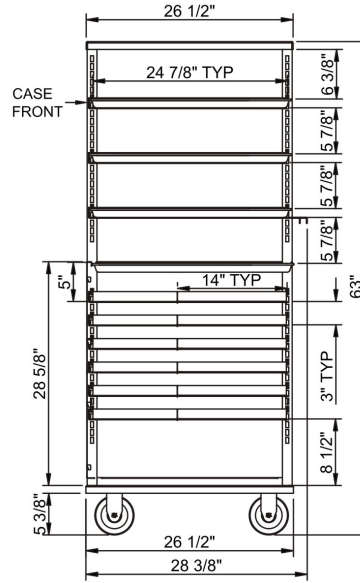

IMPORTANT NOTES:



WARNING:

This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

INTENDED ENVIRONMENT

Designed to operate in ambient conditions of 75°F with 55% relative humidity.

WARMEST AVG PRODUCT TEMP

Zone	Temp (°F)
All	

INTENDED USE OF DISPLAY AREAS

Zone	Intended Use

For more information on any of our products or services please visit us on the web at:

www.structuralconcepts.com

INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. Visit www.structuralconcepts.com for the most current specs.



888 E. Porter Rd. Muskegon, MI 49441

231-798-8888

Revised 2/13/2019

Salad/Sandwich Prep - Bread Display Shelving Cart

Must Purchase BDRxx65.5716 w/ This Cart

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
CDR7765	N/A	21.500	0.000	N/A

ELECTRICAL															
Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
CDR7765	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

REFRIGERATION													
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION				GLYCOL / R744 REFRIGERATION				
					SST (°F)	BTUH	Defrost Interval (Hrs)	Defrost Duration (Mins)	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)	
CDR7765	All	Ambient	None-N/A	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT
Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.

IMPORTANT NOTES

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES


Zone	Temp (°F)	Intended Use

REGULATORY
None



Salad/Sandwich Prep - Bread Display Shelving Cart

Must Purchase BDRxx65.5716 w/ This Cart

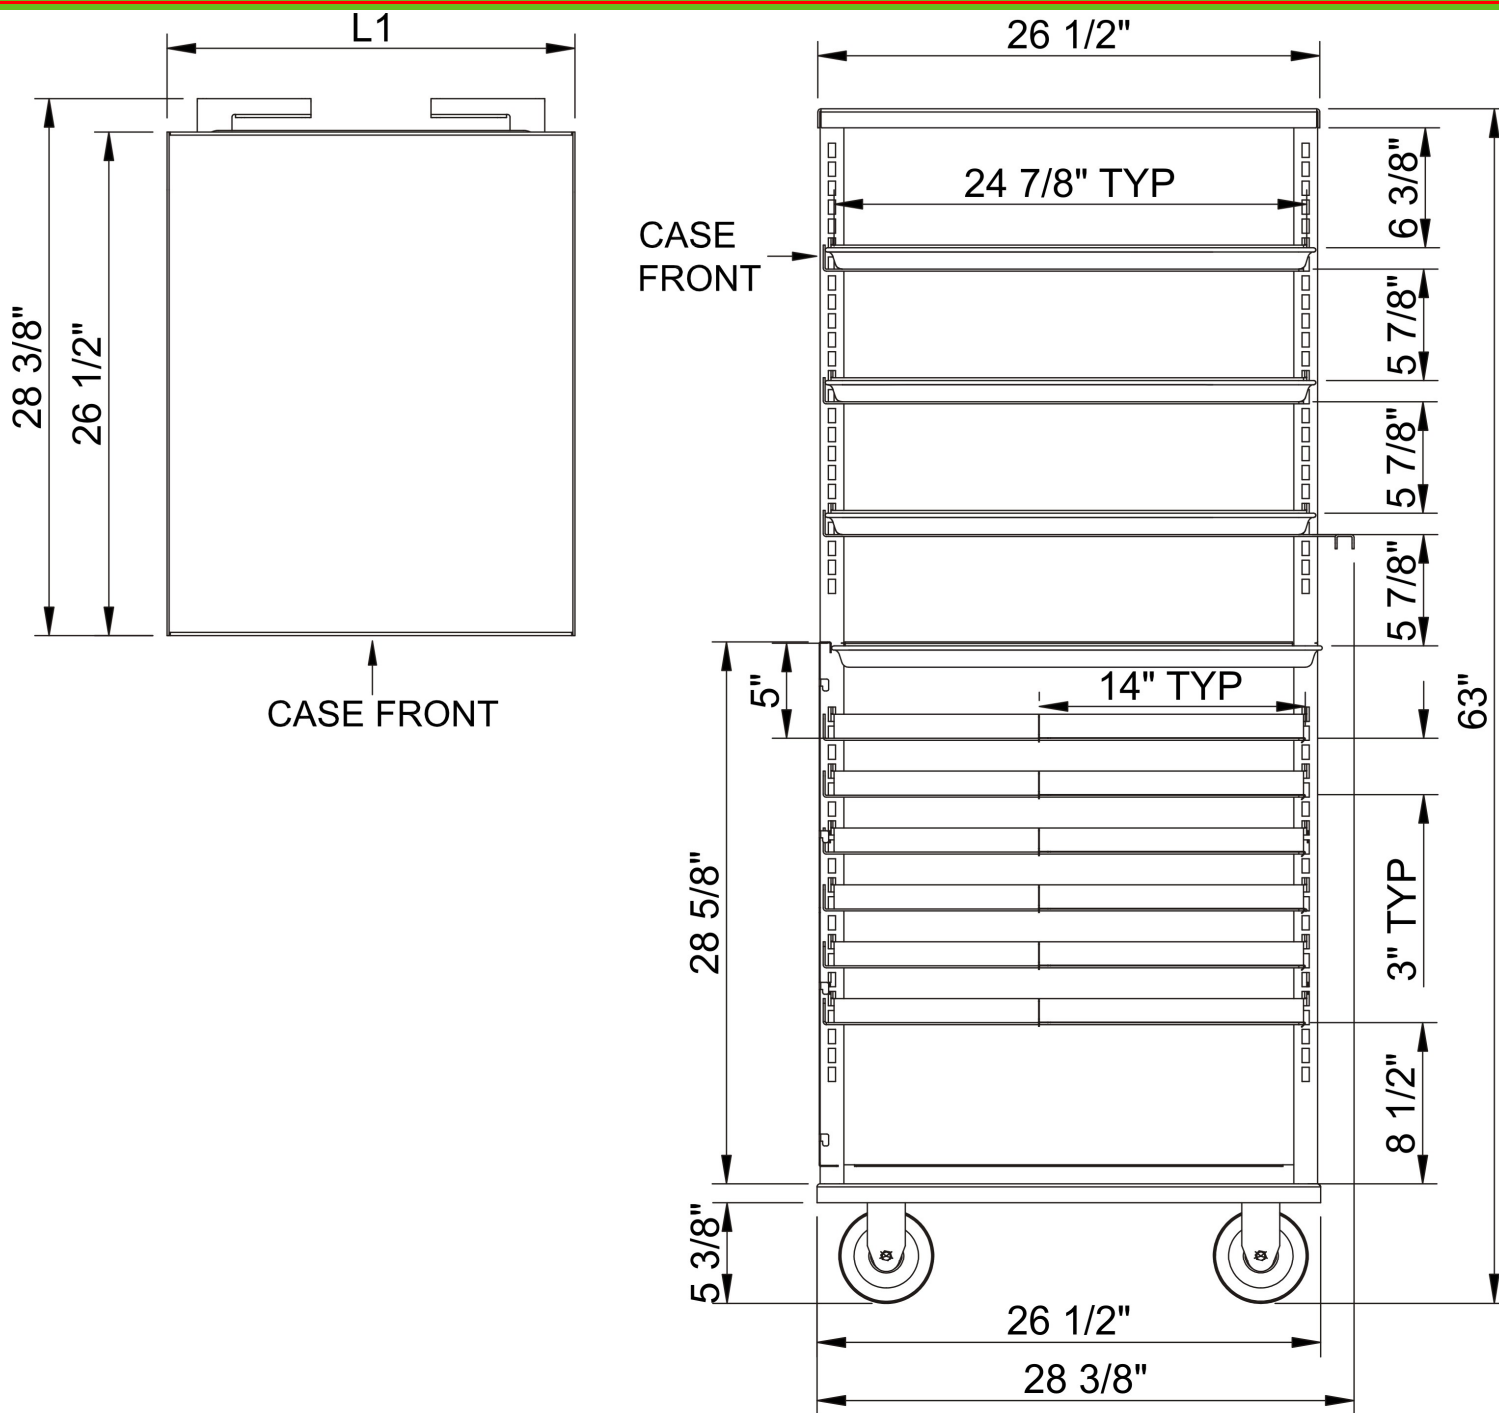

NOTE: ALL DIMENSIONS APPROXIMATE

- ⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- ⊕ REFRIGERATION LINE CONNECTION.
- ⊗ SELF-CONTAINED CASE SERVICE ACCESS AREA.
- ⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- ⊞ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- ⊞ DRY CASE SERVICE ACCESS AREA.