

# Technical Information

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

Grocerant - Refrigerated Self-Service Food Bar Island w/ Lift-up Sneeze Guard - Remote DX w/ Carel Heos Controller

DIMENSIONS / SHIPPING				
Model	L"	L1"	L2"	Est Wt (lbs)
DPI724R.6628.8114	85.500	86.250	0.000	N/A
DPI932R.6628.8114	111.250	112.000	0.000	N/A

ELECTRICAL															
Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
DPI724R.6628.8114	Remote (DX)-Type I Env	Circuit #1	110-120	1	60	3.68	15	15	195	2+G	Leads Multiple	0.70	1.40	1.58	N/A
DPI932R.6628.8114	CONTACT FACTORY FOR UPDATED INFORMATION														

REFRIGERATION															
Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION					
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)		
DPI724R.6628.8114	All	Refrigerator	Remote-DX-Type I Env	Type I	20	3,931	3,640	4.00	30.00	N/A	N/A	N/A	N/A	N/A	N/A
DPI932R.6628.8114	CONTACT FACTORY FOR UPDATED INFORMATION														

INTENDED ENVIRONMENT		
Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Envt above.		
WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES		
Zone	Temp (°F)	Intended Use
1	38	Packaged / unpackaged refrigerated products-Prechilled to Warmest Avg Prod Temp.

IMPORTANT NOTES
1) Refrigerated air flow above and below pans.




REGULATORY	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

# Technical Information

Grocerant - Refrigerated Self-Service Food Bar Island w/ Lift-up Sneeze Guard - Remote DX w/ Carel Heos Controller

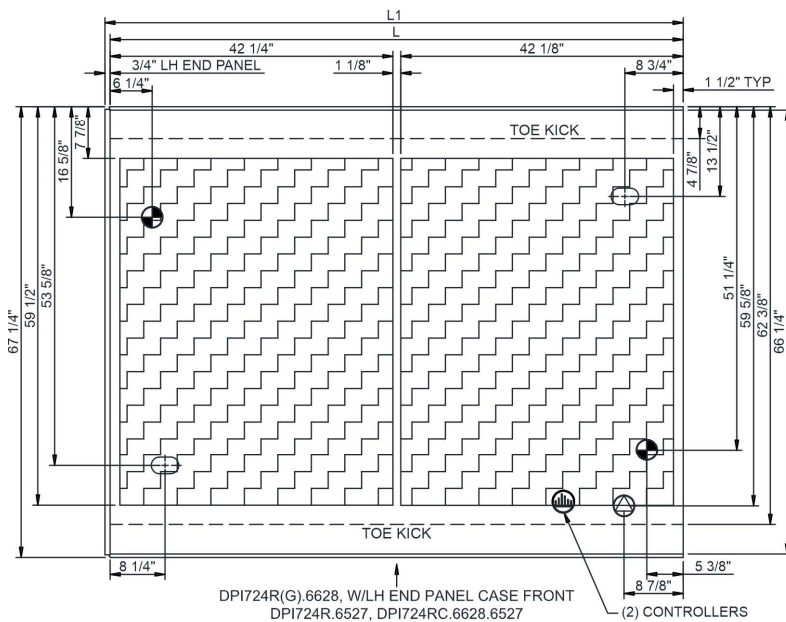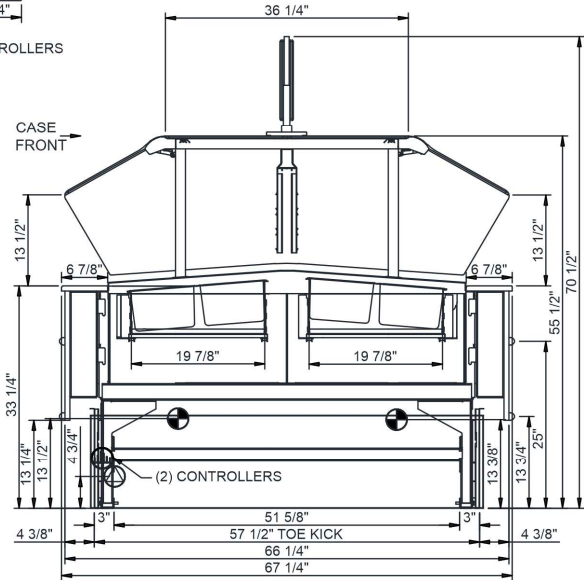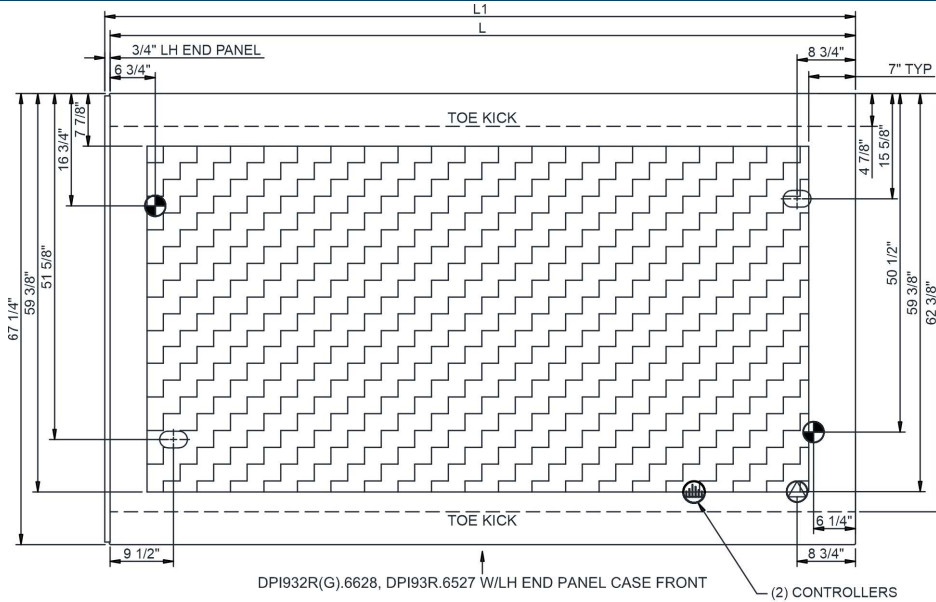

**NOTE: ALL DIMENSIONS APPROXIMATE**

⊕ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).  
○ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.  
⊕ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

⊕ SELF-CONTAINED CASE SERVICE ACCESS AREA.  
⊕ DRY CASE SERVICE ACCESS AREA.