

# Floral - F Straight Upright Door Case - Remote CO2 w/ Danfoss Controller

## Models

F2C.5587.7716




Features	Standard	Options
<b>EXTERIOR COLOR</b>	<input type="checkbox"/> Painted (Bronze Pearlescent)	
<b>INTERIOR COLOR</b>	<input type="checkbox"/> Painted (Bronze Pearlescent)	
<b>BASE SUPPORT</b>	<input type="checkbox"/> Rail system for shims	
<b>END PANELS</b>	<input type="checkbox"/> Cutaway w/ glass	<input type="checkbox"/> Full with mirror
<b>FRONT DOORS</b>	<input type="checkbox"/> Frameless glass clear view doors	
<b>HEADER</b>	<input type="checkbox"/> Decorative header	
<b>REAR</b>	<input type="checkbox"/> Solid back panel, galvanized	<input type="checkbox"/> Solid back panel, black
<b>SHELVING</b>	<input type="checkbox"/> Clear glass shelves, non-lighted	
<b>LIGHTS</b>	<input type="checkbox"/> LED lights	
<b>ELECTRICAL CONNECT</b>	<input type="checkbox"/> Leads	
<b>REFRIGERATION</b>	<input type="checkbox"/> Remote CO2 refrigeration (specify type) w/ controller piped at top	

## Applications

- Straight upright door merchandiser for fresh floral arrangements

# Floral F Straight Upright Door Case - Remote CO2 w/ Danfoss Controller

Model	L x D x H (Lengths include end panels)
F2C.5587.7716	63"L x 37-3/4"D x 98-1/8"H

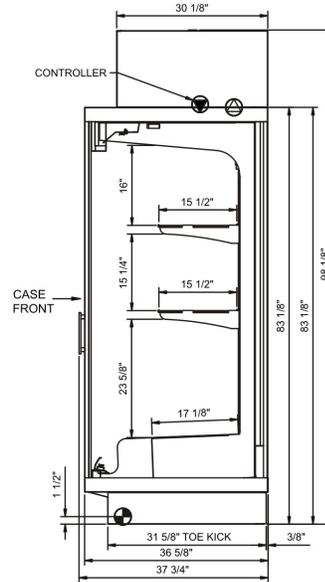

## IMPORTANT NOTES:

1) Units must be shimmed during installation to ensure the unit is level and plumb.

## ⚠️ WARNING

This product can expose you to chemicals including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## INTENDED ENVIRONMENT

Designed to operate in ambient conditions of 75°F with 55% relative humidity.

## WARMEST AVG PRODUCT TEMP

Zone	Temp (°F)
1	38

## INTENDED USE OF DISPLAY AREAS

Zone	Intended Use
1	Floral products