

Cheese - GLDSS 43"H Refrigerated Low-Capacity Self-Service Case - Remote DX w/ Dixell Controller - Carbon Gray

Models

GLDSS443R.5741-A.6527

GLDSS543R.5741-A.6527

GLDSS643R.5741-A.6527


GLDSSX443R.5741-A.6527

GLDSSX243R.5741-A.6527

GLDSSX180R.5741-A.6527

GLDSSN243R.5741-A.6527

GLDSSN443R.5741-A.6527

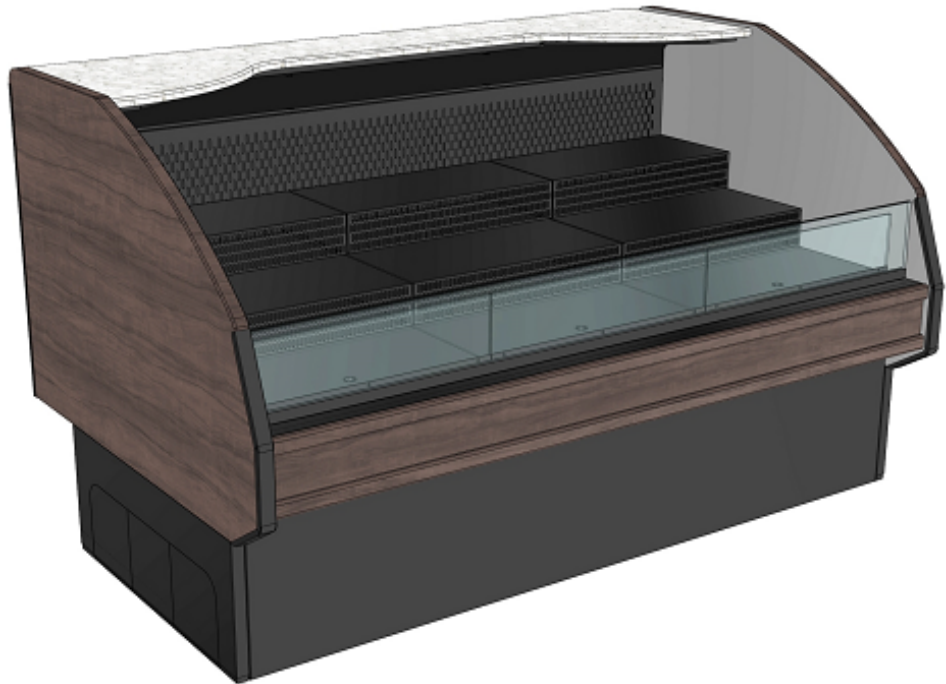

Features	Standard	Options
EXTERIOR COLOR	☐ Carbon Gray Cherry Veneer	
INTERIOR COLOR	☐ Black	
BASE	☐ 43"H refrigerated base	
BASE SUPPORT	☐ Rail system for shims	
BUMPER END	☐ None	☐ 1" bumper (Steel Gray) (3 rows)
END PANELS	☐ None	☐ ¹ Full end panel
LOWER FRONT PANEL	☐ Publix matte black	
REAR LEDGE	☐ Everest Quartz	
TOP LIGHT	☐ LED top light	
ELECTRICAL CONNECT	☐ Leads	
REFRIGERATION	☐ Remote DX refrigeration w/ Dixell controller	

Option Notes: 1 - N/A on model
GLDSSX443R.5741-A.6527


Applications

- Low capacity self-service merchandiser for refrigerated deli items.

Cheese GLDSS 43"H Refrigerated Low-Capacity Self-Service Case - Remote DX w/ Dixell Controller - Carbon Gray


STRAIGHT

Model	L x D x H (Lengths do not include 1-1/4" end panels)
GLDSS443R.5741-A.6527	48-3/4"L x 46-3/8"D x 44-1/4"H
GLDSS543R.5741-A.6527	60-1/2"L x 46-3/8"D x 44-1/4"H
GLDSS643R.5741-A.6527	74-1/2"L x 46-3/8"D x 44-1/4"H

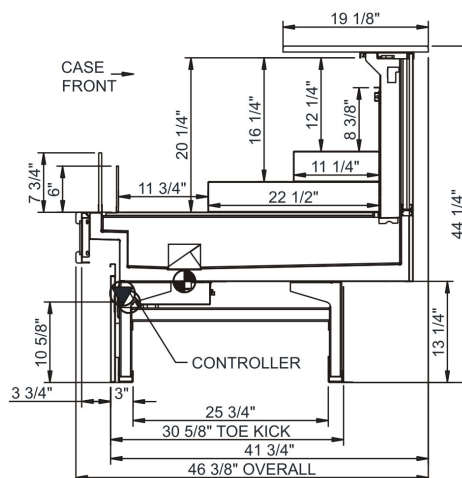


CONVEX / OUTSIDE CURVE

Model	L x D x H Lengths do not include end panels
GLDSSX443R.5741-A.6527	38-3/4"L x 46-3/8"D x 44-1/4"H
GLDSSX243R.5741-A.6527	47-5/8"L x 46-3/8"D x 44-1/4"H
GLDSSX180R.5741-A.6527	101-3/8"L x 50-1/2"D x 44-1/4"H

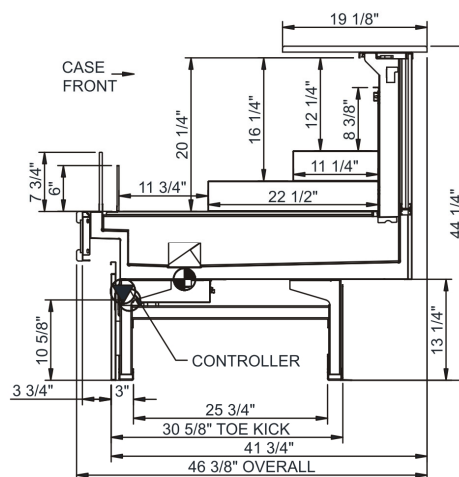

CONCAVE / INSIDE CURVE

Model	L x D x H Lengths do not include end panels
GLDSSN243R.5741-A.6527*	29-1/4"L x 46-3/8"D x 44-1/4"H
GLDSSN443R.5741-A.6527*	56-3/8"L x 46-3/8"D x 44-1/4"H

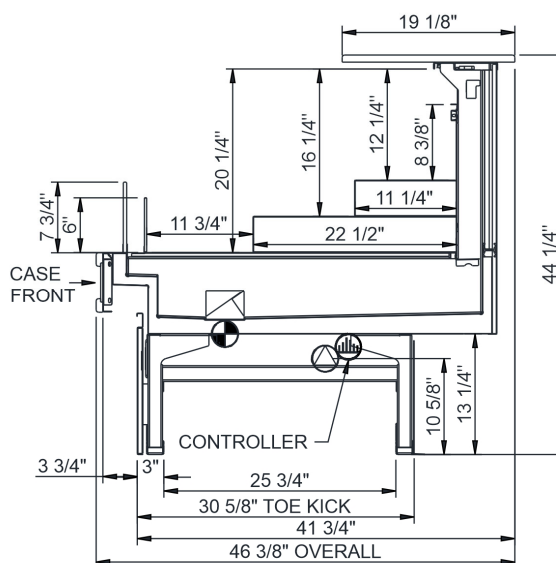

IMPORTANT NOTES:

Units must be shimmed during installation to ensure the unit is level and plumb.

WARNING

This product can expose you to chemicals including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

INTENDED ENVIRONMENT

Designed to operate in ambient conditions of 75°F with 55% relative humidity.

WARMEST AVG PRODUCT TEMP

Zone	Temp (°F)
1	38

INTENDED USE OF DISPLAY AREAS

Zone	Intended Use
1	Packaged refrigerated products

* Additional lead-time required.
INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. Visit www.structuralconcepts.com for the most current specs.