

Technical Information

Fusion - MD 85"H Self-Service Refrigerated Doored Case Self-Contained Floral

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
MD485DR	48.000	50.250	0.000	N/A
MD685DR	72.000	74.250	0.000	N/A

ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
MD485DR	Self-Contained (R290)-Type I Env	Circuit #1	110-120	1	60	10.73	15	15	1,008	2+G	5-15P or L5-15P	N/A	0.45	3.96	6.32
	Self-Contained (R290)-Type I Env	Circuit #1	110-120	1	60	10.73	15	15	953	2+G	5-15P or L5-15P	1.12	0.45	3.96	5.20
MD685DR	Self-Contained (R290)-Type I Env	Circuit #1	110-120	1	60	11.18		15	1,061	2+G	5-15P or L5-15P	N/A	0.90	3.96	6.32
	Self-Contained (R290)-Type I Env	Circuit #1	110-120	1	60	10.73	15	15	960	2+G	5-15P or L5-15P	N/A	0.45	3.96	6.32

REFRIGERATION

Model	Zone	Section	System	Env	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
MD485DR	All	Main	Self-Contained-R290-Type I Env	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
MD685DR	All	Main	Self-Contained-R290-Type I Env	Type I	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT

Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise under Env above.

IMPORTANT NOTES

1) Units must be shimmed during installation to ensure the unit is level and plumb.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Packaged / unpackaged refrigerated products-Prechilled to Warmest Avg Prod Temp.

REGULATORY



All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 & UL 60335-2-89 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7
------------	---




In Accordance with
AHRI Std 1200

Technical Information

Fusion - MD 85"H Self-Service Refrigerated Doored Case Self-Contained Floral

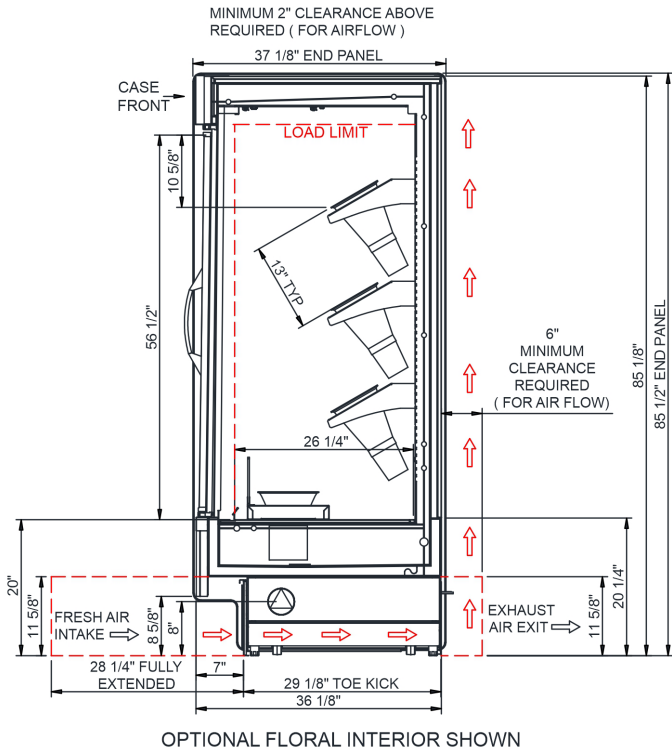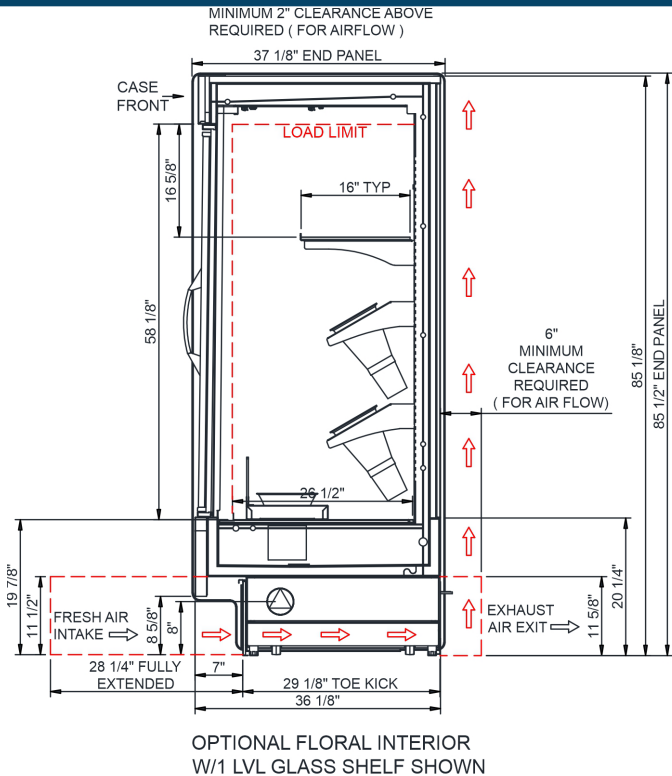

REAR DOORS OPENING	
MODEL	WD x HT x QTY
MD485DR	17" x 57 3/4" x 2
MD685DR	28 5/8" x 57 3/4" x 2

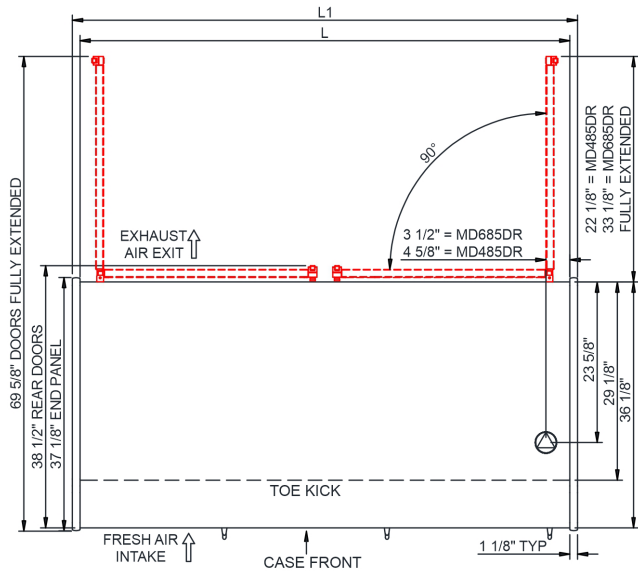

NOTE:
1. SELF-CONTAINED REFRIGERATION ACCESS ONLY BY PULLING OUT CONDENSER DRAWER.

NOTE: ALL DIMENSIONS APPROXIMATE

 ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).

 LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

 REFRIGERATION LINE CONNECTION.

 REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

 SELF-CONTAINED CASE SERVICE ACCESS AREA.

 DRY CASE SERVICE ACCESS AREA.