

Fusion

Self-Service Refrigerated Open Reach-In - 85"H Floral

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

- **MD485R** 50-1/4"L x 37-1/8"D x 85-1/2"H
- **MD685R** 74-1/4"L x 37-1/8"D x 85-1/2"H

Included

- Breeze self-contained refrigeration
- 1 year parts & labor warranty, 5 year compressor warranty
- 13"H x 8"Dia Buckets
- LED top & shelf lights
- Open reach-in front
- Stainless steel rear exterior



MD485R FLORAL


Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
INTERIOR COLOR	• Powder coated Silversan Black	• Stainless steel
LOWER FRONT PANEL COLOR	• Powder coated Silversan Black	• Powder coated (stock/non-stock colors) • Stainless steel
BASE SUPPORT	• Casters w/ levelers (self-cont.)	
BUMPER FRONT	• 1" Boston bumper (specify color)	• 1" Stainless steel plate rail bumper
END PANELS	• Full w/stainless steel interior	• Cutaway w/glass • None (specify per line-up)
VINYL GRAPHICS	• None	• Full wrap graphic set • Logo graphic only
DECKS	• Floral buckets deck	
PRICE TAG MOLDING	• None	• 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
REAR DOORS	• None (solid back panel)	
SHELVING	• (2) Levels of floral buckets, (1) level 16" clear glass shelf	
LIGHTS	• LED 3500K w/ frosted lens	
ELECTRICAL CONNECTION	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.)
REFRIGERATION	• Breeze self-contained refrigeration	
MISCELLANEOUS		• Second year parts & labor warranty (excludes compressor)
ACCESSORIES		• Additional 16" clear glass shelf • Additional floral buckets shelf • Clean Sweep® coil cleaner (self-cont.) • Night curtain, retractable, non-locking

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.



Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged / unpackaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40

PLAN VIEW

SIDE VIEW

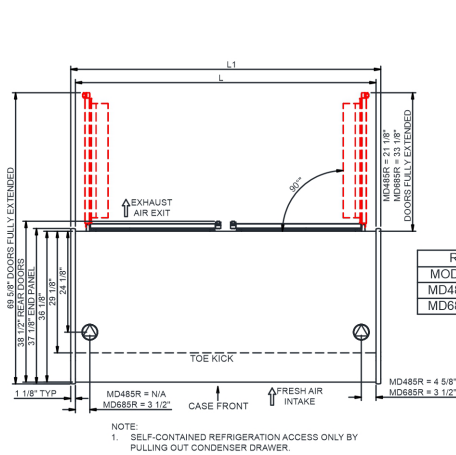

REAR DOORS OPENING		
MODEL	WD x HT x QTY	
MD485R	17\" x 57 3/4\" x 2	
MD685R	28 5/8\" x 57 3/4\" x 2	

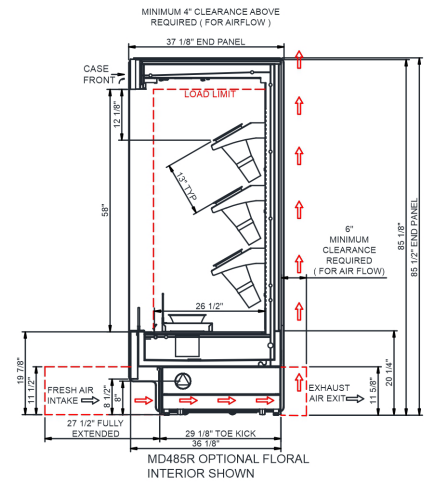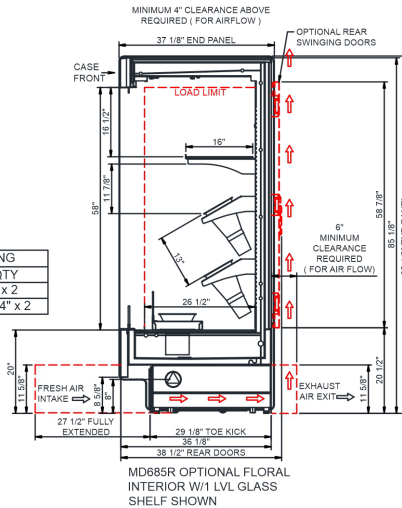

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX**
(SUPPLIED WITH 6\" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF.**
ONLY (SUPPLIED WITH 3/4\" OR 1 1/2\" PVC TUBE).

- REFRIGERATION LINE CONNECTION.**
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.**

- SELF-CONTAINED CASE SERVICE ACCESS AREA.**
- DRY CASE SERVICE ACCESS AREA.**

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
MD485R	48.00	50.25	3.00	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,864	2+G	6-20P or L6-20P	N/A	N/A	N/A	1,300
				Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,864	2+G	6-20P or L6-20P	N/A	N/A	N/A	
MD685R	72.00	74.25	3.00	Self-Contained (R290)	Circuit #1	208-240	1	60	24.00	3,863	2+G	6-30P or L6-30P	N/A	N/A	N/A	1,650
				Self-Contained (R290)	Circuit #1	208-240	1	60	24.00	3,863	2+G	6-30P or L6-30P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471 & UL 60335-2-89
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

Important Notes:

- Units must be shimmed during installation to ensure the unit is level and plumb.
- Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.