

• Q344R

35-3/4"L x 34-1/4"D x 42-3/4"H

### Included

- Condensate pan
- Hydrocarbon refrigerant (R290)
- Magnetic air filter
- One year parts & labor; 5 year compressor warranty
- Top light (LED 4000K)
- Warmest average product temperature of 40°F or less




Q344R

| Specify                        | Standard Features  | Additional Options  |
|--------------------------------|--|---|
| <b>EXTERIOR COLOR</b>          | • Powder coated Silversan Black                                  | • Laminate (stock/non-stock colors)<br>• Powder coated (stock/non-stock colors)<br>• Stainless steel  |
| <b>FRAME EXTERIOR COLOR</b>    | • Powder coated Silversan Black                                  | • Powder coated (stock/non-stock colors)<br>• Stainless steel   |
| <b>INTERIOR COLOR</b>          | • Powder coated Silversan Black                                  | • Powder coated Designer White<br>• Stainless steel   |
| <b>LOWER FRONT PANEL COLOR</b> | • Powder coated Silversan Black                                  | • Powder coated (stock/non-stock colors)<br>• Stainless steel (must choose stainless exterior)  |
| <b>REAR EXTERIOR COLOR</b>     | • Powder coated Silversan Black                                  | • Stainless steel   |
| <b>BASE SUPPORT</b>            | • Casters (non-locking) w/ levelers                              | • Casters (non-locking) w/ seismic levelers   |
| <b>END PANELS</b>              | • Full w/stainless steel interior                                | • None (synchronized defrost required)  |
| <b>REAR LEDGE</b>              | • None   | • 1" Solid surface<br>• 2 cm. Quartz (specify color)<br>• 3 cm. Quartz (specify color)<br>• Powder coated (stock/non-stock colors)<br>• Powder coated Silversan Black |
| <b>COVER/CURTAIN</b>           | • None   |   |
| <b>DISPLAY STEPS</b>           | • None   | • 2"H Full depth display step(s)  |
| <b>PRICE TAG MOLDING</b>       | • None   | • Universal price tag molding (clear w/ open top)   |
| <b>SHELVING</b>                | • Metal shelf, non-lighted                                       | • Metal shelf, lighted (LED 4000K)  |
| <b>ELECTRICAL CONNECTION</b>   | • 6' Straight blade power cord                                   | • 6' Locking power cord   |
| <b>CLEAN SWEEP</b>             | • None   | • Clean Sweep® condenser coil cleaner   |
| <b>REFRIGERATION</b>           | • Breeze~E (Type-II) self-contained refrigeration (front access) |   |
| <b>THERMOMETER</b>             | • Spirit filled thermometer                                      |   |
| <b>MISCELLANEOUS</b>           |  | • Second year parts & labor warranty (excludes compressor)  |


|  |   |                                  |
|--|---|----------------------------------|
| <b>Intended Environment:</b> Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise in system information below. |   |                                  |
| <b>Zone</b>  | <b>Intended Product To Be Displayed</b>                             | <b>Warmest Avg Prod Temp ° F</b> |
| 1  | Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp. | 40                               |

### PLAN VIEW

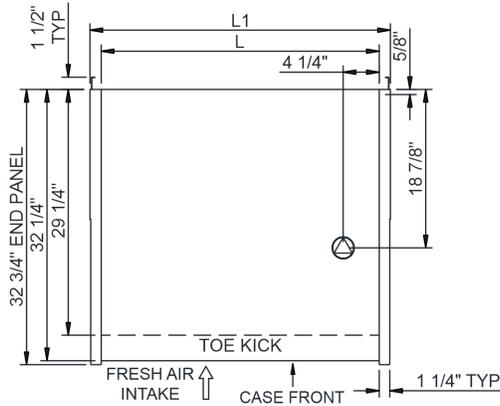

- NOTES:
- NO SELF-CONTAINED ACCESS W/O PULLING OUT CONDENSER
  - EXHAUST AIR EXITS OUT TOP REAR OF CASE

### SIDE VIEW

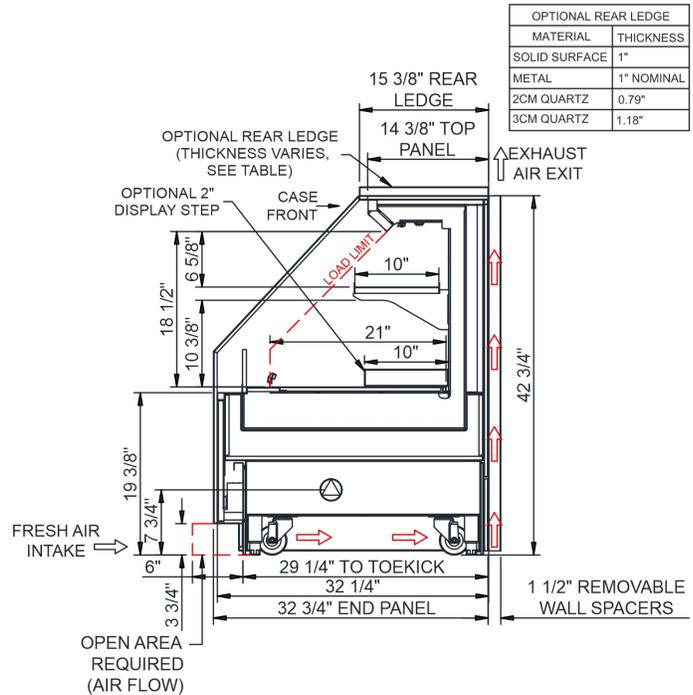

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX**  
(SUPPLIED WITH 6" LEADS OR POWER CORD).
- REFRIGERATION LINE CONNECTION.**
- SELF-CONTAINED CASE SERVICE ACCESS AREA.**
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.**
- DRY CASE SERVICE ACCESS AREA.**
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY** (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

| Model Technical Specifications |       |       |     |                       |            |         |      |          |       |       |           |                 |                 |                 |        |     |
|--------------------------------|-------|-------|-----|-----------------------|------------|---------|------|----------|-------|-------|-----------|-----------------|-----------------|-----------------|--------|-----|
| Model                          | L"    | L1"   | L2" | System Circuit Volts  |            | Phs     | Freq | Amps *** | Watts | Wires | NEMA Plug | SST             | Conv. Rack BTUH | Para. Rack BTUH | Est Wt |     |
| Q344R                          | 33.25 | 35.75 | .00 | Self-Contained (R290) | Circuit #1 | 110-120 | 1    | 60       | 15.15 | 1,491 | 2+G       | 5-20P or L5-20P | N/A             | N/A             | N/A    | 456 |

\*\*\* Does not include electric defrost on freezer models.

#### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471 & UL 60335-2-89  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

#### Important Notes:

- Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- Levelers must be adjusted during installation to ensure unit is level and plumb.
- Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- Tile floors, low ceilings, or small rooms will increase noise level.
- Compressor air intake at lower front, discharge from lower rear. Lower panels cannot be blocked. Wall spacers required for proper air flow.
- If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).