

ARM

Refrigerated Autonomous Retail Merchandiser - Slim Duo

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

• SD2826IS-SD2826IS ARM DUO 67"L x 26-3/4"D x 81-1/4"H

Included

- PO NOTE: ARM Form required at time of PO for DUO lineup
- Self-contained refrigeration (Type II)
- Clear glass swinging doors (self-closing)
- Hydrocarbon refrigerant (R290)
- LED side lights
- One year parts & labor; 5 year compressor warranty
- Warmest average product temperature of 40°F or less



SD2826IS-SD2826IS ARM DUO


Specify	Standard Features	Additional Options
STANDALONE UNIT	• SD2826IS with clear glass swinging door w/ left hinge (self-closing)	
SATELLITE UNIT	¹ • SD2826IS with clear glass swinging door w/ right hinge (self-closing)	
EXTERIOR COLOR	• Powder coated Black	
INTERIOR COLOR	• Powder coated Black	
BASE SUPPORT	• Levelers	
SHELVING	• Metal shelving (5), front lighted color indicators	
TRAYS	• (3) Trays per shelf	
LIGHTS	• LED side lights	
ELECTRICAL CONNECTION	² • 6' NEMA 5-15P, 110-120v/60/1-ph straight blade power cord	
REFRIGERATION	• Self-contained refrigeration (Type II)	
INTERNET CONNECTION	• Ethernet connection to local network	• Cellular T-Mobile \$10 per month
TERMINAL (ACQUIRER)	• Nayax VPOS Touch	

Std Notes: 1 - Second circuit required
2 - Per unit

Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40


PLAN VIEW

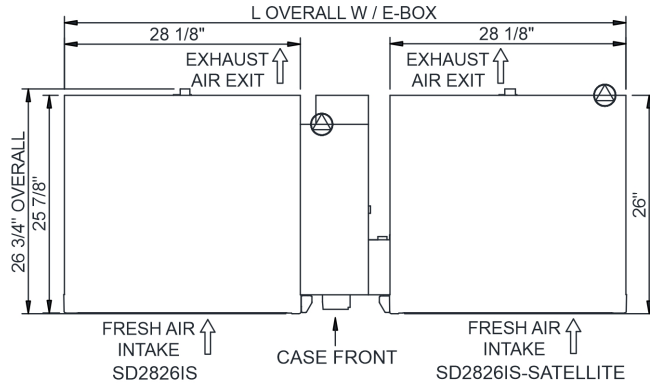

NOTES:

1. SHELF TRAY DIMENSIONS: 7 1/4" W X 18 3/8" D
2. SELF-CONTAINED ACCESS ONLY BY PULLING OUT CONDENSER DRAWER.
3. COMPRESSOR AIR FRONT INTAKE AND LOWER REAR DISCHARGE. LOWER FRONT PANEL CANNOT BE BLOCKED.

SIDE VIEW

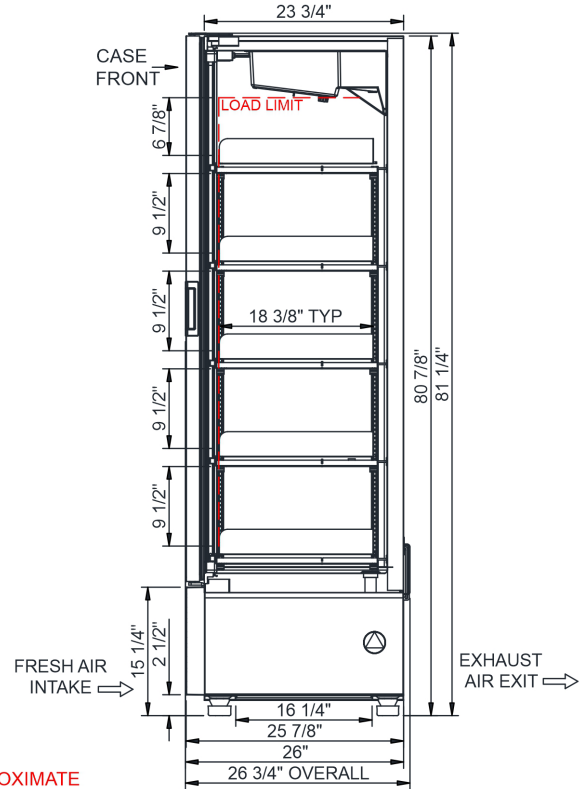

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
SD2826IS	N/A	36.50	.00	Self-Contained Satellite (R2)	Circuit #2	110-120	1	60	3.50	300	2+G	5-15P	N/A	N/A	N/A	N/A
				Self-Contained Standalone (	Circuit #1	110-120	1	60	4.50	423	2+G	5-15P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models ETL Listed to UL 541
ETL Listed to CAN/CSA 22.2 No. 128
ETL Sanitation to NSF/ANSI 25

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) ARM Form required at time of PO for this standalone unit w/ E-Box.
- 2) 8" Rear clearance required for proper air flow.
- 3) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 4) Levelers must be adjusted during installation to ensure unit is level and plumb.
- 5) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 6) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 7) Tile floors, low ceilings, or small rooms will increase noise level.
- 8) Compressor air intake at lower front, discharge from lower rear. Lower panels cannot be blocked.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.